


ELECTROFUSED FLOORING GRATING

HEEL PROOF GRATING

According to D.M. 14 June 1989 n. 236 - Art. 4.2.2


TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
15x76	25x2	∅ 4	6100x1000	25,60	27,60
15x76	30x2	∅ 4	6100x1000	30,60	33,05
15x76	40x2	∅ 4	6100x1000	40,70	44,00
15x76	25x3	∅ 5	6100x1000	38,50	41,50
15x76	30x3	∅ 5	6100x1000	46,00	49,68
15x76	40x3	∅ 5	6100x1000	61,16	66,05
15x76	50x3	∅ 5	6100x1000	76,31	82,42
15x76	60x3	∅ 5	6100x1000	91,50	98,80
15x76	70x3	∅ 5	6100x1000	109,50	117,20
15x76	80x3	∅ 5	6100x1000	125,00	134,00

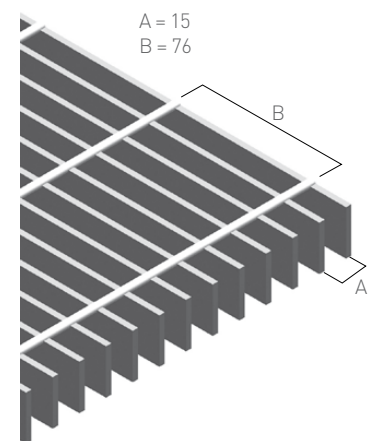

BALL PROOF GRATING

According to D.M. 14 June 1989 n. 236 - Art. 8.2.2

TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
22x76	25x2	∅ 4	6100x1000	19,22	20,82
22x76	30x2	∅ 4	6100x1000	22,79	24,61
22x76	40x2	∅ 4	6100x1000	25,40	27,40
22x76	25x3	∅ 5	6100x1000	29,30	31,70
22x76	30x3	∅ 5	6100x1000	34,70	37,50
22x76	40x3	∅ 5	6100x1000	44,00	47,00
22x76	50x3	∅ 5	6100x1000	54,61	59,00
22x76	60x3	∅ 5	6100x1000	68,32	73,78
22x76	70x3	∅ 5	6100x1000	79,06	85,38
22x76	50x4	∅ 6	6100x1000	65,80	70,00
22x76	60x4	∅ 6	6100x1000	78,00	84,00
22x76	70x4	∅ 6	6100x1000	91,00	98,00
SERRATED					
22x76	30x3	∅ 5	6100x1000	34,70	37,50

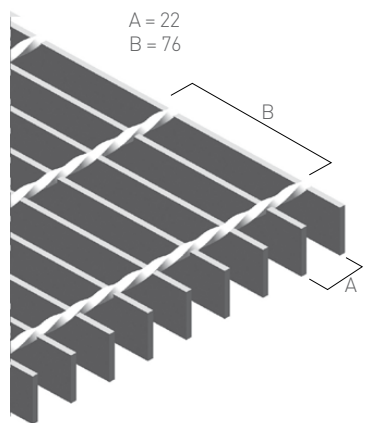

According to D.M. 14 June 1989 n. 236 art. 4.2.2


Grating used in pedestrian application have to had meshes with space that do not represent and obstacle or perils for wheels, walking stick and similar.

According to D.M. 14 June 1989 n. 236 art. 8.2.2

Grating used in flooring application have to had meshes with a space that cannot be crossed by a ball of 2 cm of diameter.


BUILDING

TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
25x24	25x2	∅ 4	6100x1000	20,20	21,82
25x50	25x2	∅ 4	6100x1000	16,90	18,50
25x76	25x2	∅ 4	6100x1000	16,25	17,50
25x76	30x2	∅ 4	6100x1000	19,32	20,90
25x76	40x2	∅ 4	6100x1000	25,40	27,40
25x76	25x3	∅ 5	6100x1000	24,50	26,40
25x76	30x3	∅ 5	6100x1000	29,10	31,50
25x76	40x3	∅ 5	6100x1000	38,50	41,50
25x76	50x3	∅ 5	6100x1000	47,80	51,60
25x76	60x3	∅ 5	6100x1000	57,10	61,70
25x76	70x3	∅ 5	6100x1000	69,00	71,00
25x76	80x3	∅ 5	6100x1000	78,00	84,00
25x76	50x4	∅ 6	6100x1000	65,80	70,00
25x76	60x4	∅ 6	6100x1000	78,00	84,00
25x76	70x4	∅ 6	6100x1000	91,00	98,00
25x76	80x4	∅ 6	6100x1000	104,00	112,00
SERRATED					
25x76	30x3	∅ 5	6100x1000	29,10	31,50

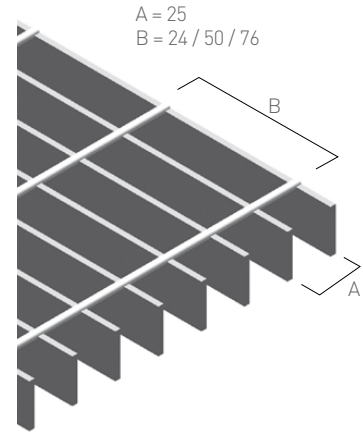


INDUSTRY

TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
30x50	25x3	∅ 5	6100x1000	24,91	26,91
30x50	30x3	∅ 5	6100x1000	28,92	31,23
30x50	40x3	∅ 5	6100x1000	36,92	39,88
30x50	40x4	∅ 5	6100x1000	47,60	51,41
SERRATED					
30x50	30x3	∅ 5	6100x1000	28,92	31,23
SERRATED					
30x50	30x5	∅ 5	6100x1000	55,03	59,43
30x100	25x3	∅ 5	6100x1000	22,47	24,26
30x100	30x3	∅ 5	6100x1000	26,47	28,59
30x100	40x3	∅ 5	6100x1000	34,48	37,24
30x100	40x4	∅ 5	6100x1000	45,15	48,77
SERRATED					
30x100	30x3	∅ 5	6100x1000	26,47	28,59
SERRATED					
30x100	30x5	∅ 5	6100x1000	53,62	57,91

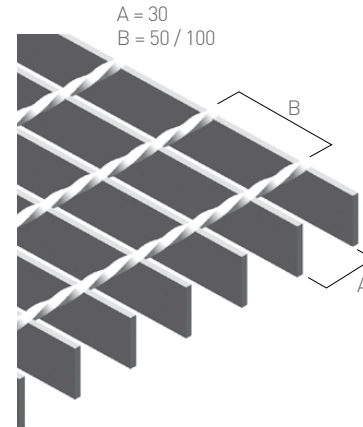


INDUSTRY

TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
34x38	25X2	◇ 4	6100x1000	15,30	16,55
34x38	30X2	◇ 4	6100x1000	16,10	17,40
34x38	25X3	◇ 5	6100x1000	23,90	25,80
34x38	30X3	◇ 5	6100x1000	27,40	29,60
34x38	40X3	◇ 5	6100x1000	34,40	37,20
SERRATED					
34x38	30x3	◇ 5	6100x1000	27,40	29,60
34x76	25x2	◇ 4	6100x1000	12,48	13,48
34x76	30x2	◇ 5	6100x1000	14,82	16,00
34x76	25x3	◇ 5	6100x1000	20,87	22,54
34x76	30x3	◇ 5	6100x1000	23,90	25,80
34x76	40x3	◇ 5	6100x1000	30,82	33,30

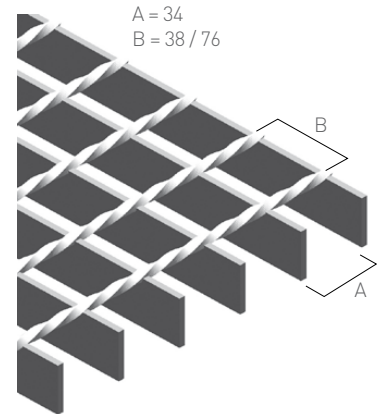

INDUSTRY

TYPE			GRATING		
MESH	BEARING BAR	CROSS BAR	DIMENSIONS	WEIGHT	
				RAW	GALVANIZED
mm	mm	mm	mm	Kg/m ²	Kg/m ²
41x100	20x3	◇ 5	6100x1000	12,70	13,59
41x100	25x3	◇ 5	6100x1000	17,16	18,54
41x100	30x3	◇ 5	6100x1000	20,11	21,71
41x100	40x3	◇ 5	6100x1000	23,40	25,04
41x100	25x5	◇ 5	6100x1000	25,50	27,28
41x100	30x5	◇ 5	6100x1000	30,50	32,63
41x100	40x5	◇ 5	6100x1000	41,40	44,29
41x100	50x5	◇ 5	6100x1000	51,40	54,99
SERRATED					
41x100	25x3	◇ 5	6100x1000	12,70	13,59
41x100	30x3	◇ 5	6100x1000	20,11	21,71
41x100	25x5	◇ 5	6100x1000	25,50	27,28
41x100	30x5	◇ 5	6100x1000	30,50	32,63


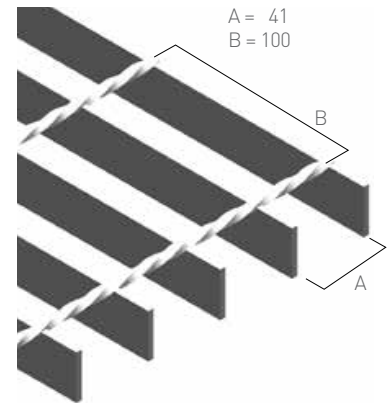


GALVANIZED FRAMED PANELS

MESH	BEARING BAR	CROSS BAR	DIMENSION	FRAME	WEIGHT GALVANIZED
mm	mm	mm	mm	mm	Kg./each
15x76	25x2	∅ 4	150x1000	25x2	5,2
15x76	25x2	∅ 4	200x1000	25x2	6,7
15x76	25x2	∅ 4	250x1000	25x2	8,2
15x76	25x2	∅ 4	300x1000	25x2	9,7
15x76	25x2	∅ 4	400x1000	25x2	12,6
15x76	25x2	∅ 4	500x1000	25x2	15,7
15x76	25x2	∅ 4	600x1000	25x2	18,6
15x76	25x2	∅ 4	700x1000	25x2	21,6
15x76	25x2	∅ 4	800x1000	25x2	24,6
15x76	25x2	∅ 4	900x1000	25x2	27,6
15x76	25x2	∅ 4	1000x1000	25x2	30,5
25x50	25x2	∅ 4	150x1000	25x2	3,7
25x50	25x2	∅ 4	200x1000	25x2	4,7
25x50	25x2	∅ 4	250x1000	25x2	5,7
25x50	25x2	∅ 4	300x1000	25x2	6,6
25x50	25x2	∅ 4	400x1000	25x2	8,6
25x50	25x2	∅ 4	500x1000	25x2	10,5
25x50	25x2	∅ 4	600x1000	25x2	12,5
25x50	25x2	∅ 4	700x1000	25x2	14,4
25x50	25x2	∅ 4	800x1000	25x2	16,4
25x50	25x2	∅ 4	900x1000	25x2	18,3
25x50	25x2	∅ 4	1000x1000	25x2	20,3
25x76	30x3	∅ 5	200x1000	30x3	8,1
25x76	30x3	∅ 5	300x1000	30x3	11,4
25x76	30x3	∅ 5	400x1000	30x3	14,7
25x76	30x3	∅ 5	500x1000	30x3	18,1
15x76	30x3	∅ 5	600x1000	30x3	21,4

STAIR TREADS COMPLETE WITH PLATE TO BE BOLTED AND ANTI SLIP FRONT NOSING

MESH	BEARING BAR	CROSS BAR	DIMENSION	WEIGHT GALVANIZED
mm	mm	mm	mm	Kg./each
15x76	25x2	∅ 4	1200x325(*)	13,17
15x76	25x2	∅ 4	1000x323	11,33
15x76	30x2	∅ 4	1200x325(*)	15,13
25x76	25x2	∅ 4	600x267	4,56
25x76	25x2	∅ 4	800x267	5,76
25x76	25x2	∅ 4	1000x267	6,93
25x76	25x3	∅ 4	1000x267	9,01

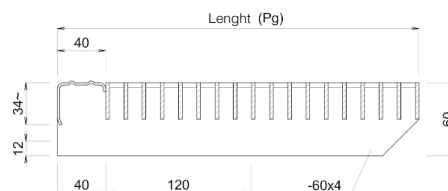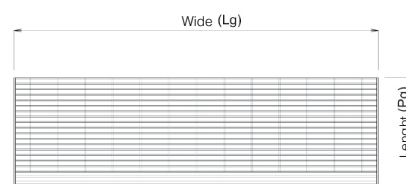

(*) According to D.M. 14 June 1989 n° 236 - art. 4.2.2